

V&B EUROPE GMBH



VICTORY BX-52RS-H WOOD SHREDDER

For Tractors With CAT I. 3-Point-Hitch



FREE DELIVERY

- + For tractors from 30 - 60 HP
- + Hydraulic feeding system
- + Integrated hydraulic system



VICTORY

www.victory-tractor.com

VICTORY BX-52RS-H WOOD SHREDDER

PTO shaft driven wood chipper with fully integrated hydraulic feeding system for professional and fast processing of wood with up to 15 cm in diameter.



PTO shaft with
shear bolt
Included

24 months
Warranty

12 months for commercial customers



included

€ **from 2.148**



The Victory BX-52RS-H hydraulic wood shredder complies with all safety regulations and is CE tested following the 2006/42/EC machine directive

Tractor hydraulic wood shredder wood chipper system



Hydraulic wood shredder for tractors with 30 hp to 60 hp with CAT I. 3-point hitch

- 1** Up to 1000 rpm rotor speed.
- 2** 4 rotor knives cut the wood up to 67 times per sec.
- 3** PTO shaft with shear bolt.
- 4** Foldable Input chute, for easy storage.
- 5** BX-52RS-H is delivered fully assembled.
- 6** PTO shaft driven hydraulic system with tank and pump; no hydraulic connector on tractor needed.
- 7** Direct PTO drive.
- 8** Maintenance-friendly thanks to the foldable rotor and feeding system cover.
- 9** Adjustable infeed roller speed.



Technical Specifications BX-52RS-H WOOD SCHREDDER

DATA	BX-52RS-H
Dimensions (HxWxD)	220 x 100 x 220 cm
Total weight	340 kg
3-point hitch	CAT I
Max. PTO shaft RPM	540 - 1000 RPM 1 3/8" 6T
Length of PTO shaft	700 mm
Length of hydraulic pipes from lower hitch	1100 mm
Best result achieved with	1000 RPM
PTO security	shear bolt
Drive system	direct drive
Min. tractor hydraulic performance	pressure: 165 bar / 2400 psi / 16.5 mpa, flow: 13 L/min / 3.5 gpm
Tractor engine power recommended	30-60 HP / 22-45 kw
Power needed for max. performance	40-50 HP
Rotor diameter	59 cm
Rotor width	16 mm
Rotor weight	45 kg
Number of knives	4 + 1
Rotor knife / counter knife size	21 x 6 x 0,9 cm / 18 x 6 x 0,8 cm
Counter knife adjusting area	0 - 8 mm
Hopper opening	60 x 54 cm
Chipper housing opening	14 x 17 cm
Recommended diameter of shredding material	<12 cm
Size of shredded material	1 - 5 cm
Feeding system	Hydraulic forward/backward
Discharge hopper max height from ground	220 cm
Output chute	0-230°
Rotor housing strength	6 mm
Painting	powder coated
Transport rack (LxWxH)	210 x 100 x 110 cm

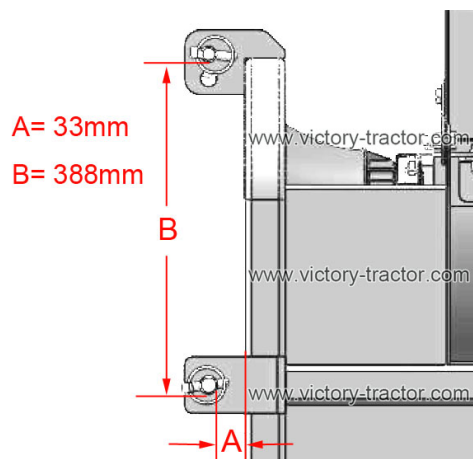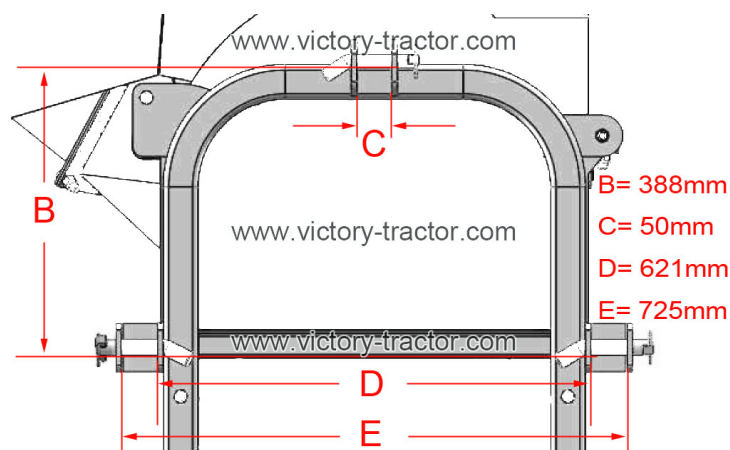



ONLINE-SHOP FOR TRACTOR ATTATCHMENTS

Tiller, Stone Burrier Tillers, Cultivators, Wood Shredders, Wood Chippers
Stump Grinder, Trenchers, Shaft Grinder, Wood Splitter and Log Saws



Contact

Phone: + 49 (0) 4188 4444 773

E-mail: info@victory-tractor.com

V&B Europe GmbH
Am Flidderberg 74
D-21256 Handeloh - Germany