



# VICTORY HTLG ROTARY TILLER

For Tractors With CAT I. 3-Point-Hitch



- + Working widths of 100-140 cm
- + Up to 18 cm working depth
- + For tractors from 20 - 45 HP



# VICTORY HTLG FOR SMALL TRACTORS

Victory HTLG tillers are perfect machines for thorough tilling any kind of soil on small and medium size land with an working width of 100 cm to 140 cm for small tractors.



Adjustable  
working depth

24 months  
Warranty

12 months for commercial customers



included

€ from 1.198



The Victory HTLG tiller comply with all safety regulations and are CE tested following the 2006/42/EC machine directive and the respective harmonized standards.

Working widths of 100 - 140 cm

**Heavy duty tiller cultivator for small and medium tractors with 20 hp to 45 hp with CAT I. 3-point hitch**


- 1 Side transmission with oil bath gear.
- 2 Free-wheel transmission protects your tractor after PTO is switched off.
- 3 Easy positioning of the tiller behind your tractor by our adjustable Cat I lower hitches.
- 4 Rear safety cover; spring controlled.
- 5 Front safety covers for HTLG tiller.
- 6 PTO shaft with friction clutch included in the shipment.
- 7 Detailed multi-lingual user manual.






# Technical Specifications VICTORY HTLG TILLER

Technical Data	HTLG-100	HTLG-120	HTLG-140
Dimensions (LxWxH)	1240 x 540 x 540 mm	1440 x 540 x 540 mm	1640 x 540 x 540 mm
Total weight	156 kg	172 kg	190 kg
Working width	980 mm	1180 mm	1410 mm
Working depth (depending on soil cond.)	120 bis 180 mm		
3-point hitch	Cat I		
PTO shaft specification	540 U/min		
PTO shaft length	750 mm		
PTO shaft security	friction clutch		
Drive system	side transmission		
Transmission oil capacity	1,5L gear box 2,0L side transmission		
Tractor engine power recommended	20-30 HP	20-35 HP	30-45 HP
Rotor RPM at 540 RPM PTO	270		
Material strength knife shaft cover	4 mm		
Material strength side walls	6 mm		
Painting	powder coating, red		
No of blades per flange	6	6	6
Number of blades (separately exchangeable)	24	30	36
Rotor shaft diameter/material strength	50 mm / 5 mm		
Weight per blade	610 g		
Transport box (LxWxH)	130 x 60 x 60 cm	150 x 60 x 60 cm	170 x 60 x 60 cm
Transport box (KG)	182 kg	200 kg	222 kg

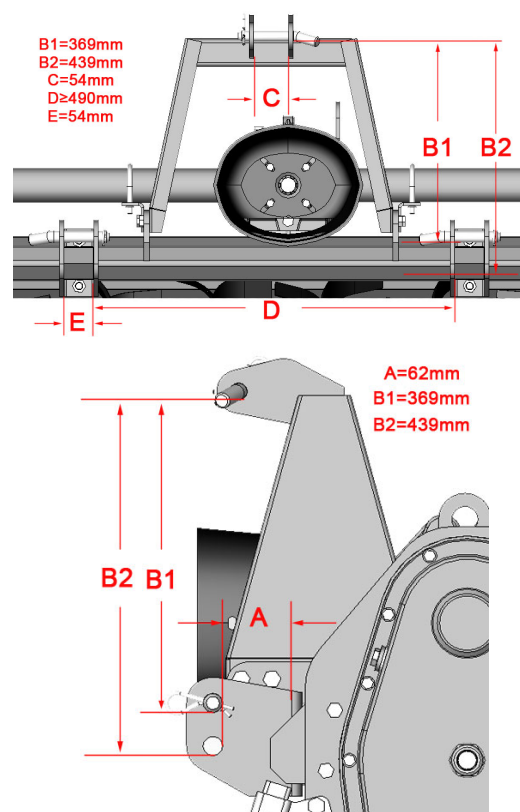

Modell	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
HTLG-140	496	224	224	506	54	70	370
HTLG-120	381	224	224	391	54	70	370
HTLG-100	266	224	224	276	54	70	370

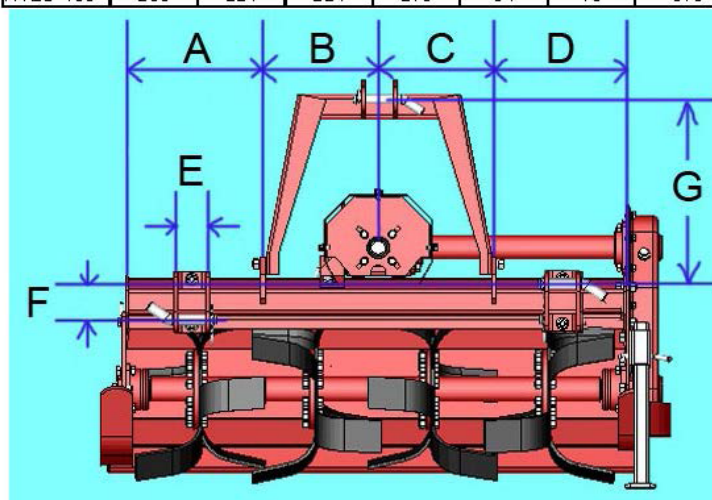



## **ONLINE-SHOP FOR TRACTOR ATTATCHMENTS**

Tiller, Reverse Tillers, Cultivators, Wood Shredders, Wood Chippers  
Stump Grinder, Trenches, Shaft Grinder, Wood Splitter and Log Saws



### **Contact**

Phone: + 49 (0) 4188 4444 773

E-mail: [info@victory-tractor.com](mailto:info@victory-tractor.com)

V&B Europe GmbH  
Am Flidderberg 74  
D-21256 Handeloh - Germany