



VICTORY HTLU ROTARY TILLER

For Tractors With CAT II. 3-Point-Hitch



- ✚ Working widths of 185 - 235 cm
- ✚ Up to 22 cm working depth
- ✚ For tractors from 50 - 90 HP



VICTORY HTLU FOR CAT II TRACTORS

The working width of 135 cm to 235 cm and the adjustable working depth of up to 22 cm makes the Victory HTLU tiller superior to standard tillers in the medium level.



Adjustable
working depth

24 months
Warranty

12 months for commercial customers



included

€ from 2.598



The Victory HTLU tiller comply with all safety regulations and are CE tested following the 2006/42/EC machine directive and the respective harmonized standards.

Working widths of 185 - 235 cm



Tiller cultivator for tractors with 50 hp to 90 hp with CAT II. 3-point hitch

- 1 Side transmission with oil bath gear for PTO-speed with 540 or 750 RPM.
- 2 Free-wheel transmission protects your tractor after PTO is switched off.
- 3 Easy positioning of the tiller behind your tractor by our adjustable lower hitches.
- 4 Rear safety cover; spring controlled.
- 5 Front safety covers for HTLU tiller.
- 6 PTO shaft with friction clutch included in the shipment.
- 7 Detailed multi-lingual user manual.




Technical Specifications VICTORY HTLU TILLER

Technical Data	HTLU-185	HTLU-210	HTLU-235
Dimensions (LxWxH)	2005 x 950 x 1140 mm	2255 x 950 x 1140 mm	2505 x 950 x 1140 mm
Total weight	492 kg	528 kg	556 kg
Working width	1850 mm	2100 mm	2350 mm
Working depth (depending on soil cond.)	Up to 220 mm		
3-point hitch	Cat II		
PTO shaft specification	540 / 750 U/min		
PTO shaft length	1000 mm		
PTO shaft security	friction clutch		
Drive system	side transmission		
Transmission oil capacity	2,5L gear box 2,0L side transmission		
Tractor engine power recommended	50-80 HP	60-80 HP	70-90 HP
Rotor diameter and material strength	89 mm / 10 mm		
Gear box gear options	16 / 17 & 14 / 19 (14 / 19 in accessory carton)		
Rotor RPM at 540 RPM PTO	158 / 201 / 227 / 290		
Rotor RPM at 750 RPM PTO	219 / 279 / 315		
Material strength knife shaft cover	4 mm		
Material strength side walls	8 mm		
Painting	powder coating, red		
No of blades per flange	6		
Number of blades (separately exchangeable)	42	48	54
Rotor shaft diameter/material strength	89 mm / 10 mm		
Weight per blade	1075 g		
Transport box (LxWxH)	220 x 91 x 90 cm	235 x 91 x 90 cm	260 x 91 x 90 cm

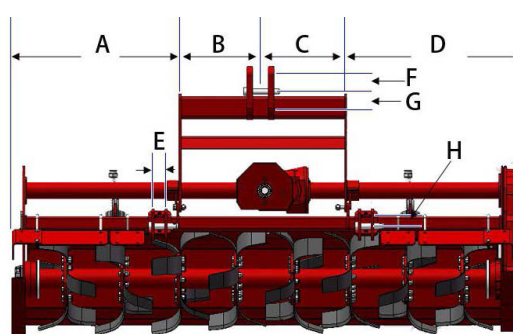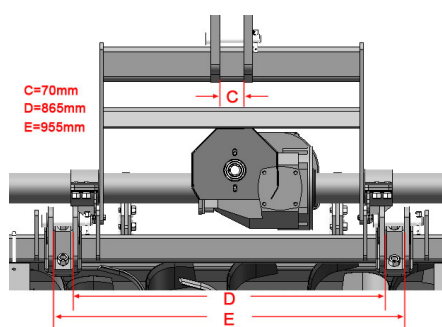

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)
HTLU-185	610	370	370	645	45	70	70	40
HTLU-210	735	370	370	770	45	70	70	40
HTLU-235	860	370	370	895	45	70	70	40

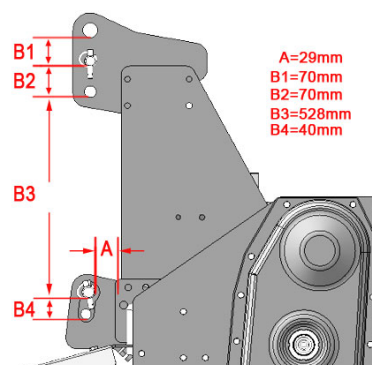



ONLINE-SHOP FOR TRACTOR ATTATCHMENTS

Tiller, Reverse Tillers, Cultivators, Wood Shredders, Wood Chippers
Stump Grinder, Trenches, Shaft Grinder, Wood Splitter and Log Saws



Contact

Phone: + 49 (0) 4188 4444 773

E-mail: info@victory-tractor.com

V&B Europe GmbH

Am Flidderberg 74

D-21256 Handeloh - Germany