



VICTORY HTLX ROTARY TILLER

For Tractors With CAT II. 3-Point-Hitch



- + Working widths of 235 - 310 cm
- + Up to 27 cm working depth
- + For tractors from 70 - 130 HP



VICTORY HTLX FOR TRACTORS

The working width of 235 cm to 310 cm and the adjustable working depth of up to 27 cm makes the Victory HTLX tiller superior to standard tillers in the medium level.



Adjustable
working depth

24 months
Warranty

12 months for commercial customers



included

€ from 3.898



The Victory HTLX tiller comply with all safety regulations and are CE tested following the 2006/42/EC machine directive and the respective harmonized standards.

Working widths of 235 - 310 cm



Tiller cultivator for tractors with 45 hp to 140 hp with CAT II. 3-point hitch

- 1 Side transmission with oil bath gear for 540 / 1000 rpm PTO speed for various rotor speeds.
- 2 Free-wheel transmission protects your tractor after PTO is switched off.
- 3 Easy positioning of the tiller behind your tractor by our adjustable lower hitches.
- 4 Rear safety cover; spring controlled.
- 5 Front safety covers for HTLX tiller.
- 6 PTO shaft with friction clutch included in the shipment.
- 7 Detailed multi-lingual user manual.



Technical Specifications VICTORY HTLX TILLER

Technical Data	HTLX-235	HTLX-285	HTLX-310
Dimensions (LxWxH)	2480 x 1080 x 1290 mm	2980 x 1080 x 1290 mm	3180 x 1080 x 1290 mm
Total weight	780 kg	889 kg	975 kg
Working width	2350 mm	2860 mm	3100 mm
Working depth (depending on soil cond.)	Up to 270 mm		
3-point hitch	Cat II		
PTO shaft specification	540 / 1000 RPM		
PTO shaft length	1000 mm		
PTO shaft security	friction clutch		
Drive system	side transmission		
Transmission oil capacity	3,8L gear box 2,0L side transmission		
Tractor engine power recommended	70-130 hp	85-130 hp	100-130 hp
Rotor diameter and material strength	102 mm / 14 mm		
Gear box gear options	19/21 & 17/23 (17/23 in accessory carton)		
Rotor RPM at 540 RPM PTO	143/175/214/262		
Rotor RPM at 1000 RPM PTO	265/324		
Material strength knife shaft cover	4 mm		
Material strength side walls	8 mm		
Painting	powder coating, red		
No of blades per flange	6		
Number of blades (separately exchangeable)	54	66	72
Rotor shaft diameter/material strength	102 mm / 14 mm		
Weight per blade	1230 g		
Transport box (LxWxH)	280 x 100 x 100 cm	330 x 100 x 100 cm	350 x 100 x 100 cm

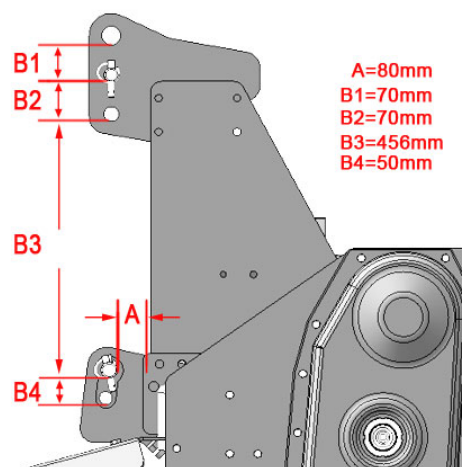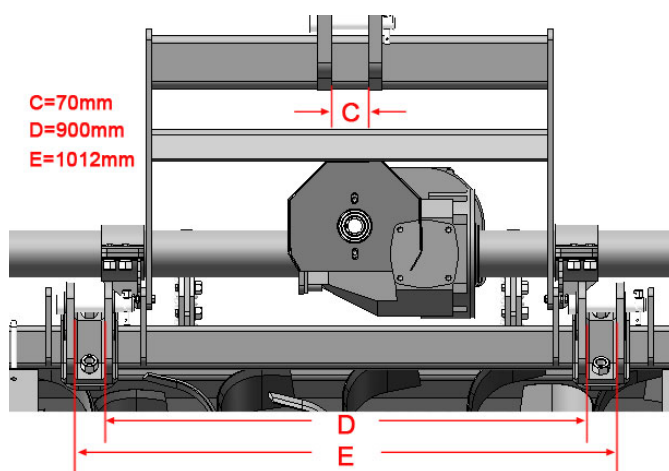



ONLINE-SHOP FOR TRACTOR ATTATCHMENTS

Tiller, Reverse Tillers, Cultivators, Wood Shredders, Wood Chippers
Stump Grinder, Trenches, Shaft Grinder, Wood Splitter and Log Saws



Contact

Phone: + 49 (0) 4188 4444 773

E-mail: info@victory-tractor.com

V&B Europe GmbH

Am Flidderberg 74

D-21256 Handeloh - Deutschland