

**V&B EUROPE GMBH**



# VICTORY BX-72RS WOOD SHREDDER

For Tractors With CAT I. & II. 3-Point-Hitch



+ For tractors from 30 - 100 HP

+ Hydraulic feeding system



[www.victory-tractor.com](http://www.victory-tractor.com)

# VICTORY BX-72RS WOOD CHIPPER

PTO shaft driven wood chipper with hydraulic feeding system for professional and fast processing of wood with up to 18 cm in diameter.



PTO shaft with friction clutch included

24 months  
Warranty

12 months for commercial customers



included

€ from 2.798



The Victory BX-72RS hydraulic wood shredder complies with all safety regulations and is CE tested following the 2006/42/EC machine directive

## Tractor hydraulic wood shredder wood chipper system



### Hydraulic wood chipper for tractors with 30 hp to 100 hp with CAT I. 3-point hitch

- 1 Up to 1000 rpm rotor speed.
- 2 4 rotor knives cut the wood up to 67 times per sec.
- 3 PTO shaft with adjustable friction clutch
- 4 Foldable input chute, for easy storage.
- 5 Adjustable feeding speed.
- 6 Hydraulic forward / backward.
- 7 BX-72RS is delivered fully assembled.
- 8 Direct PTO drive system.
- 9 Maintenance-friendly thanks to the foldable rotor and feeding system cover.



# Technical Specifications VICTORY BX-72RS WOOD CHIPPER


DATA	BX-72RS
Dimensions (HxWxD)	240 x 122 x 230 cm
Total weight	490 kg
3-point hitch	CAT I & II
Max. PTO shaft RPM	540 - 1000 RPM 1 3/8" 6T
Length of PTO shaft	1000 mm
Length of hydraulic pipes from lower hitch	1100 mm
Best result achieved with	1000 RPM
PTO security	adjustable friction clutch
Drive system	direct drive
Min. tractor hydraulic performance	pressure: 165 bar / 2400 psi / 16,5 mpa, flow: 13 L/min / 3,5 gpm
Tractor engine power recommended	30-100 HP / 22-75 kw
Power needed for max. performance	60-70 HP
Rotor diameter	75 cm
Rotor width	20 mm
Rotor weight	95 kg
Number of knives	4 + 1 + 1
Rotor knife size / counter knife size	24 x 6 x 0,9 cm / 21,5 x 6 x 0,9 cm / 11,5 x 6 x 0,9 cm
Counter knife adjusting area	0 - 8 cm
Hopper opening	90 x 73 cm
Chipper housing opening	18 x 20 cm
Recommended diameter of shredding material	< 18 cm
Distance lower edge of feeding chute to the ground	60 cm
Distance feeding rollers to the knives	8 cm
Size of shredded material	1 - 5 cm
Feeding system	Hydraulic forward/backward
Discharge hopper max height from ground	230 cm / optional 50 cm available
Output chute	0-230°
Rotor housing strength	6 mm
Painting	powder coated
Transport box (LxWxH)	145 x 115 x 85 cm

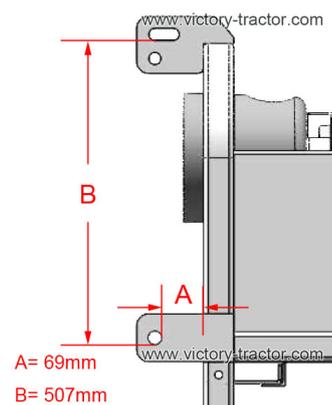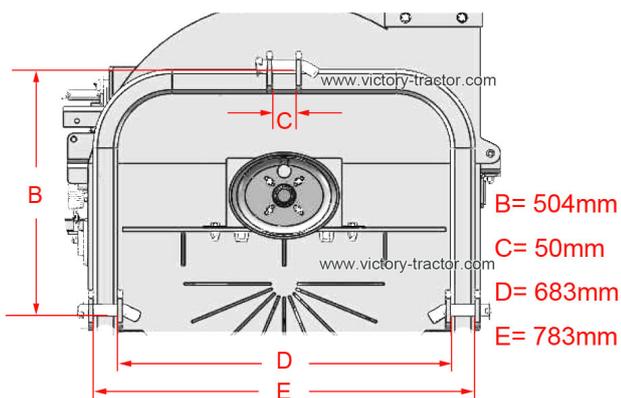



## **ONLINE-SHOP FOR TRACTOR ATTACHMENTS**

Tiller, Stone Burrier Tillers, Cultivators, Wood Shredders, Wood Chippers  
Stump Grinder, Trenchers, Shaft Grinder, Wood Splitter and Log Saws

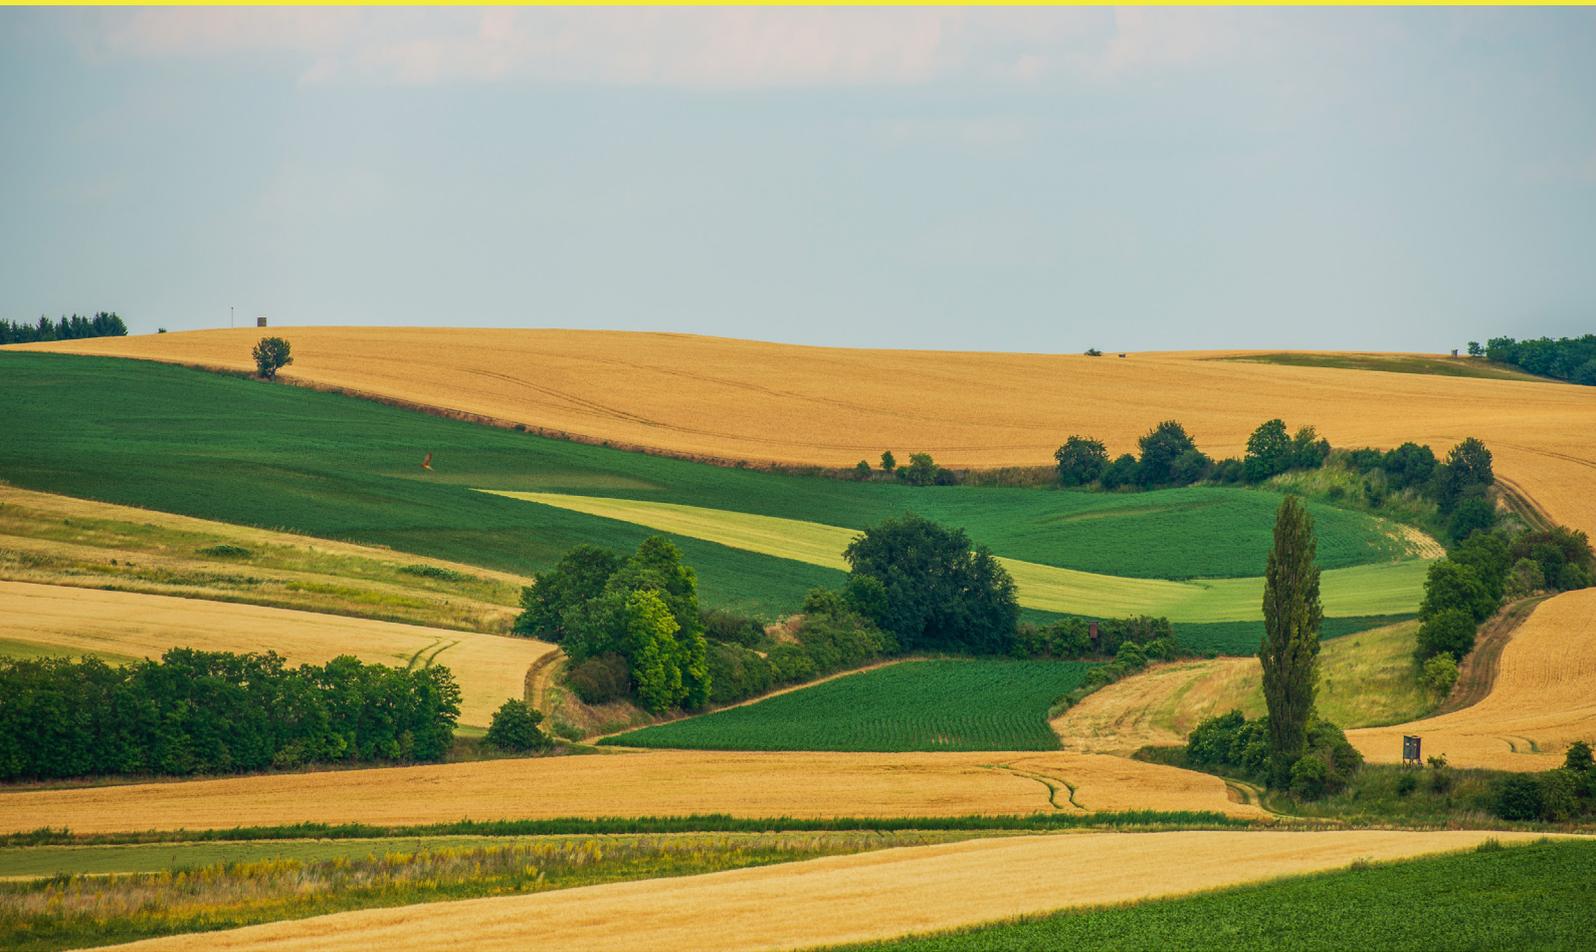

### **Contact**

Phone: + 49 (0) 4188 4444 773

E-mail: [info@victory-tractor.com](mailto:info@victory-tractor.com)

V&B Europe GmbH

Am Flidderberg 74

D-21256 Handeloh - Germany