

**V&B EUROPE GMBH**



# VICTORY GSF-1500 STUMP GRINDER

With Engine E-Starter




- + With 15 hp petrol engine
- + With engine key-starter
- + 10 replaceable grinding teeth



[www.victory-tractor.com](http://www.victory-tractor.com)

# GSF-1500 stump grinder with engine

Stump and root grinder with powerful 15 hp Briggs&Stratton engine for fast removal of interfering roots and tree stumps up to 25 cm depth.

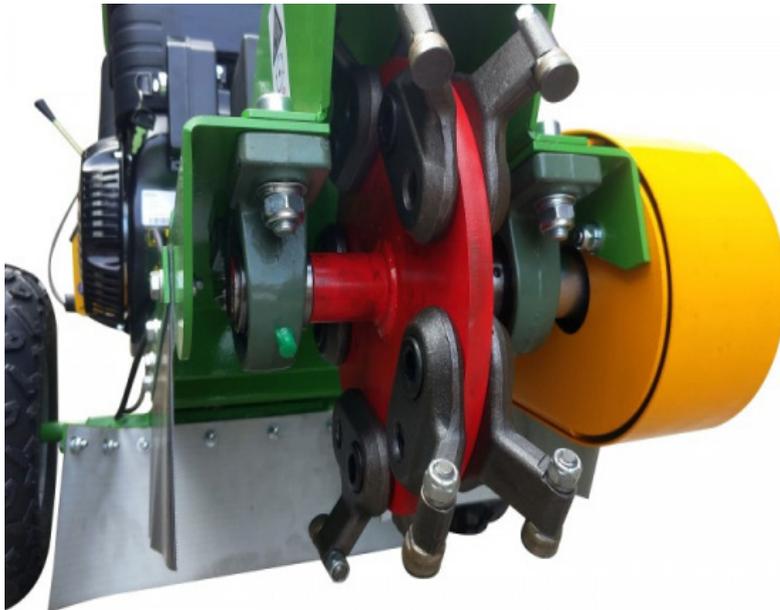

with  
petrol engine

24 months  
Warranty

12 months for commercial customers



€ from 1.148



The Victory GSF-1500 stump grinder complies with all safety regulations and is CE tested following the 2006/42/EC machine directive.

## Powerful stump grinder for removing roots and tree stumps

**Removing roots and tree stumps from your garden using excavators and tractors can cause big and expensive damage to your garden and paved areas. The GSF-1500 stump grinder solves these problems instantly.**

- 1** Stump grinder removes tree stumps and roots from 25 cm above ground to 25 cm below ground..
- 2** Compact passage width of only 80 cm for easy operation almost anywhere.
- 3** Grinding teeth can be used from three sides each for triple tooth lifetime.
- 4** Ergonomic, adjustable handle for easy operation and transport of the stump grinder.
- 5** Spare part supply available in the parts section of our online shop.
- 6** Ten new hardened and separately exchangeable tungsten carbide grinding teeth for efficient results.
- 7** GSF-1500 stump grinder has a grinding wheel with 30 cm diameter and 9 cm width.



## Technical Specifications VICTORY GSF-1500 STUMP GRINDER

DATA	GSF-1500
Dimensions (LxWxH)	1650 x 750 x 1220 mm
Weight	100 kg
Track width	760 mm
Tire size	145/70-6 35 cm diameter
Engine displacement	420 ccm 1 cyl 4 stroke
Performance	15 HP
Starter	recoil starter + E-starter
Gas tank	6,6 Ltr.
Engine oil	SAE 5W-30 / 1,1 Ltr.
Fuel consumption	1,2-1,5 L/h unleaded E10
RPM	max. 3600 U/min
Grinding drive sytem	twin belt drive
Grinding rotor	300 x 90 mm
Grinding teeth	10
Grinding teeth material	chrome molybdenum steel with tungsten carbide head
Teeth mounting brackets material	chrome molybdenum steel
Grinding rotor RPM	max. 2400 rpm
Grinding	below ground approx. 25 cm / above ground approx. 25 cm
Max. working angle allowed	20°
Brake system	drum brake
Housing material strength	2 - 4 mm
Painting	powder coating, yellow
Wooden transport box	106 x 80 x 64 cm



## **ONLINE-SHOP FOR TRACTOR ATTACHMENTS**

Tiller, Stone Burrier Tillers, Cultivators, Wood Shredders, Wood Chippers  
Stump Grinder, Trenchers, Shaft Grinder, Wood Splitter and Tilting Log Saws



### **Contact**

Phone: + 49 (0) 4188 4444 773

E-mail: [info@victory-tractor.com](mailto:info@victory-tractor.com)

V&B Europe GmbH

Am Flidderberg 74

D-21256 Handeloh - Germany