

V&B EUROPE GMBH



VICTORY SB REVERSE TILLER

For Tractors With CAT I. 3-Point-Hitch



- + Working widths of 105 - 165 cm
- + Up to 12 cm working depth
- + For tractors from 20 - 60 HP



VICTORY SB REVERSE TILLER

The Victory SB reverse tiller, also called Stone Burier, which is describing its function best, is the ideal tiller for preparing the soil for sowing.



Adjustable
working depth

24 months
Warranty

12 months for commercial customers



included

€ from 1.628



The Victory SB tiller comply with all safety regulations and are CE tested following the 2006/42/EC machine directive and the respective harmonized standards.

Working widths of 105 - 165 cm



Tiller cultivator for tractors with 20 hp to 60 hp with CAT I. 3-point hitch

- 1 Side transmission with oil bath chain.
- 2 Free-wheel transmission protects your tractor after PTO is switched off.
- 3 Easy positioning of the tiller behind your tractor by 120 mm adjustable Cat I lower hitches.
- 4 Rear safety cover; spring controlled.
- 5 Large 450 mm rear gabion roller for perfectly preparing the soil for sowing.
- 6 PTO shaft with friction clutch included in the shipment.
- 7 Loosens and sifts the soil so that roots and stones are placed beneath the humus layer.



Technical Specifications VICTORY SB REVERSE TILLER

DATA	SB-105	SB-125	SB-145	SB-165
Dimensions (LxWxH)	1160 x 1330 x 920 mm	1360 x 1330 x 920 mm	1560 x 1330 x 920 mm	1560 x 1330 x 920 mm
Total weight	345 kg	365 kg	395 kg	425 kg
Working width stone burrier reverse tiller	1050 mm	1200 mm	1450 mm	1650 mm
Diameter rear gabion roller				450 mm
Max. working depth				120 mm
3-point hitch tractor				Cat. I
PTO shaft				540 U/min
PTO shaft length				1000 mm
PTO shaft security				friction clutch
Drive system				chain in oil bath
Transmission oil capacity				1,5L gear box 1,5L side box
Tractor engine power recommended	20 - 35 HP	20 - 40 HP	20 - 50 HP	35 - 60 HP
Rotor shaft RPM and 540 rpm PTO shaft speed				220
Material strength rotor shaft cover				4 mm
Material strength side wall				8 mm
Painting				powder coating, red
Number of blades per flange				4
Number of blades (separately exchangeable)	20	24	28	32
Rotor shaft diameter/material strength				60 mm / 5 mm
Weight per blade				550 g
Wooden transport box (LxBxH)	141 x 143 x 80 cm	161 x 143 x 80 cm	181 x 143 x 80 cm	201 x 143 x 80 cm
Total Weight	372 KG	398 KG	428 KG	456 KG

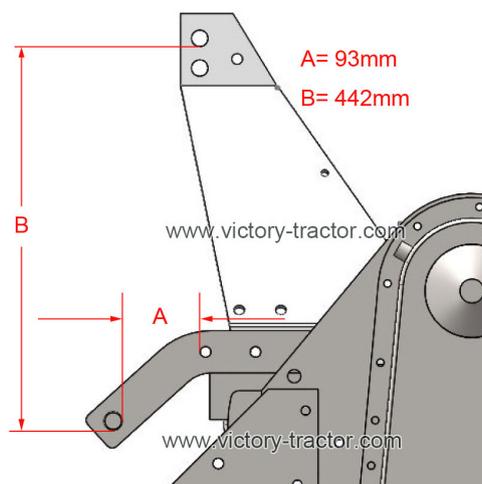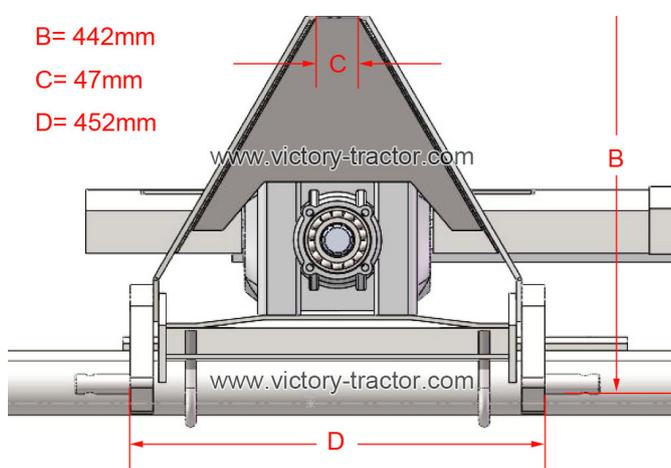



ONLINE-SHOP FOR TRACTOR ATTACHMENTS

Tiller, Reverse Tiller, Cultivators, Wood Shredders, Wood Chippers

Stump Grinder, Trenchers, Shaft Grinder, Wood Splitter and Tilting Log Saws



Contact

Phone: + 49 (0) 4188 4444 773

E-mail: info@victory-tractor.com

V&B Europe GmbH

Am Flidderberg 74

D-21256 Handeloh - Germany